



OTDR LAUNCH CABLE MINI BOX

HIGH QUALITY, SMALL DIMENSIONS

MINI OTDR BOX measurement cables are a solution that combines the highest parameters as well as the smallest dimensions and weight.

The product was made for the convenience of use and based on the experience of installers.

The main advantages of the MINI version starter are:

- compact dimensions
- reinforced cables and connectors
- repeatable measurement parameters

- // CORNING FIBER
- // VERY LOW WEIGHT
- // UNIQUE SMALL DIMENSIONS
- // HARD CASING
- // HIGH QUALITY CONNECTORS
- // DOUBLE HOOKING SYSTEM





A special housing protects the fiber from damage.
Ergonomic shape positively influencing the comfort of work.

- // Dimensions 90/70/23 mm
- // Weight <130g for fibers up to 300m

DURABLE PLASTIC HOUSING



Top-class fibers ensure low attenuation launch cable and high connector parameters.

- // Standard lengths: 150, 200, 300m
- // SM fibers (G652.D, G657.x)

CORNING FIBER



Perfectly polished connectors guarantee the highest parameters.
Special construction with increased durability.

- // Available types of connectors: SC, LC, ST, FC
- // IL <0,2dB
- // RL: UPC > 52dB, APC > 65dB (for 1550nm wavelength)

HIGH-QUALITY CONNECTORS



Long ends provide comfort and freedom during work.
The reinforced structure of the cable protects the fibers from damage.


- // Standard Length: 1.2 ~ 1.5m
- // Additional dielectric coating

STEEL STRIP BRAID



The special design of the plug ensures that it will always be there at hand. Clean connectors are an important parameter of measurement cables

PROTECTIVE DUST CAPS

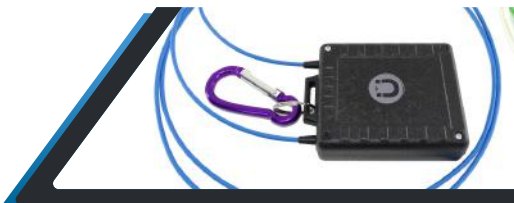

Innovative fastening system - magnetic surface allows you to attach the launch cable to metal items. The carabiner makes it easy to hang it on the belt or a leash.

DOUBLE HOOK SYSTEM

